

ECU
REMAPPING

CARS/TRUCKS/TRACTORS
MODULES

MOTORBIKES
MODULES

POWER TEST
BENCHES



User manual

1 KRB-EVO2-004 (D,E,H,S) / KRB-RAC2-004 (D,E,H,S)

Applicability

KTM	890 Adventure/R	2024->
HUSQVARNA	Norden 901	2021->
KTM	890 SMT	2025->
KTM	790 Adventure	2025->
KTM	790 Duke	2025->

Precautions/Disclaimers

For the correct RAPID BIKE module function (later shortened to 'RB'), the motorcycle system must be intact and fully functional. Installation must be carried out by competent personnel and the supply conditions such as "Appendix 1" at the end of this instruction manual, must be read and accepted.



ATTENTION

It is essential that the motorcycle's electrical system is intact, taking care to check the functionality of all its parts (fuses, connectors, etc.).


1.1 Preliminary operations

1. Switch off the engine.
2. Remove the seat.
3. Remove the front and side fairings, including the fuel tank.
4. Disconnect and remove the battery.
5. Remove the battery holder and move the engine control unit.

1.2 INJECTION Section

Position:
under the tank.


Connector:
2 pins type, GRAY color.

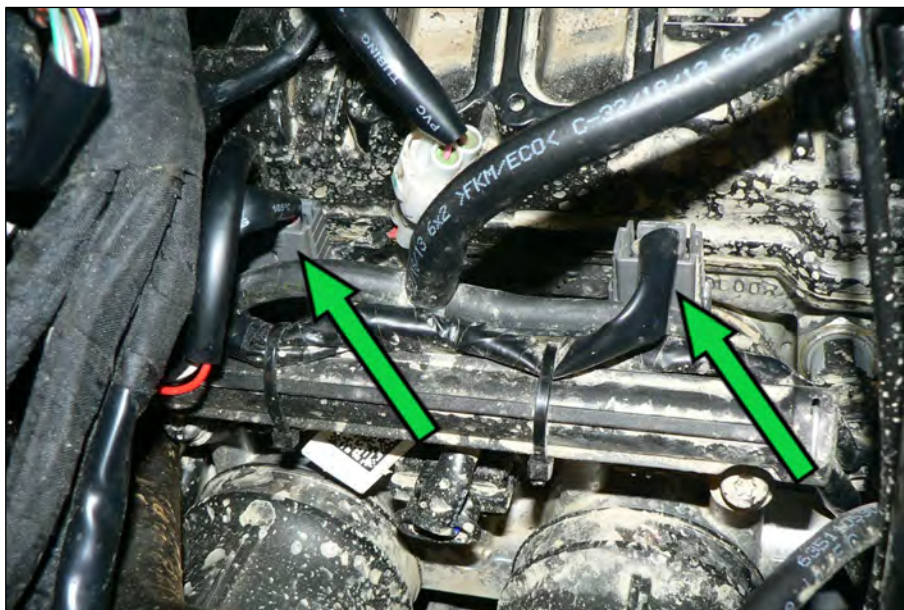

What to do:

Disconnect the original connectors and interpose those of the Rapid Bike harness signed as **INJECTOR**.

The order to follow is: **INJ.1** for the LEFT cylinder and **INJ.2** for the RIGHT one.

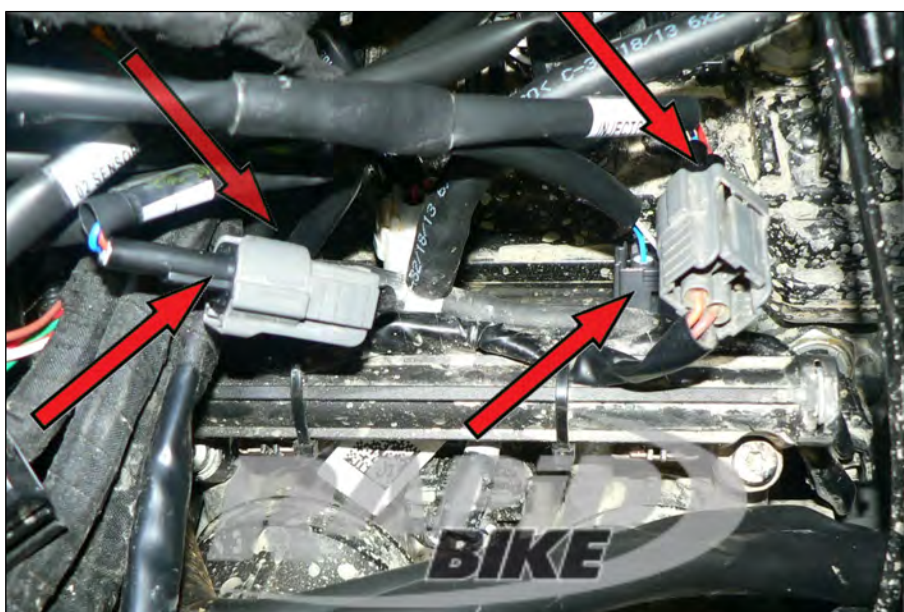


1.3 PICK-UP (CRANKSHAFT sensor) Section

Position:

under the tank.

Connector:

2 pins type, BLUE color.

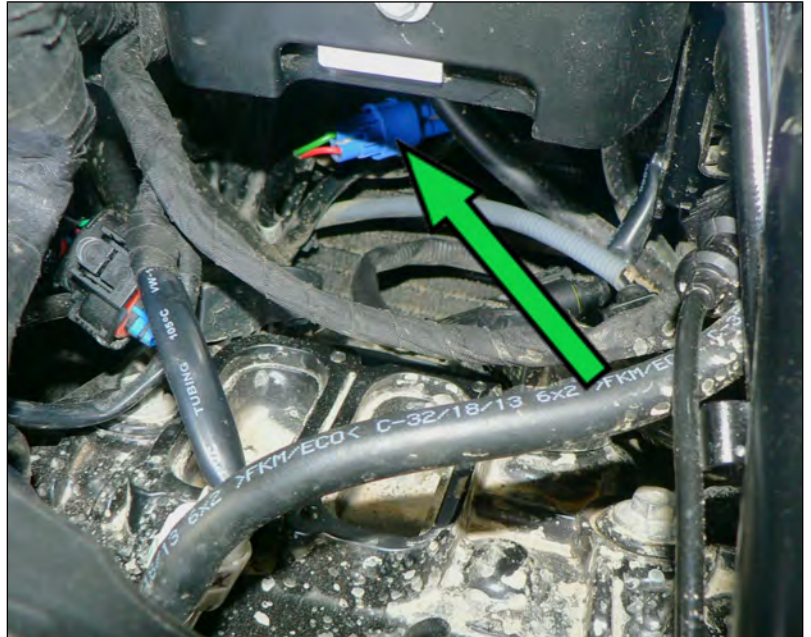**What to do:**

Connect the RB connectors (labeled "CRANK SENSOR") to the original wiring.



1.4 LAMBDA SENSORS Section

1.4.1 O2 Sensor (Lambda) cylinder 1.

Position:

Left side, on the front.

Connectors:

4 pins type, BLACK color.



What to do:

Disconnect the original connectors and interpose those of the Rapid Bike harness signed as **O2 SENSOR 1** .

1.4.2 O2 Sensor (Lambda) cylinder 2.

Position:

Right side, on the front.

Connectors:

4 pins type, BLACK color.

**What to do:**

Disconnect the original connectors and interpose those of the Rapid Bike harness signed as **O2 SENSOR 2**.

NOTICE

For EURO 5+ versions, although there is an additional Lambda probe (O2 sensor) after the catalytic converter, this will not be connected to the Rapid Bike wiring.

1.5 POWER SUPPLY Section

1.5.1 Reassemble and reconnect the battery.

1.5.2 Ground eyelet (GND)


1. Connect the eyelet from the RB wiring to the negative pole of the battery.



1.6 DIAGNOSTIC Section

Position: under the central hull near the battery.

Connector: 6 pins Diagnostic, RED color.

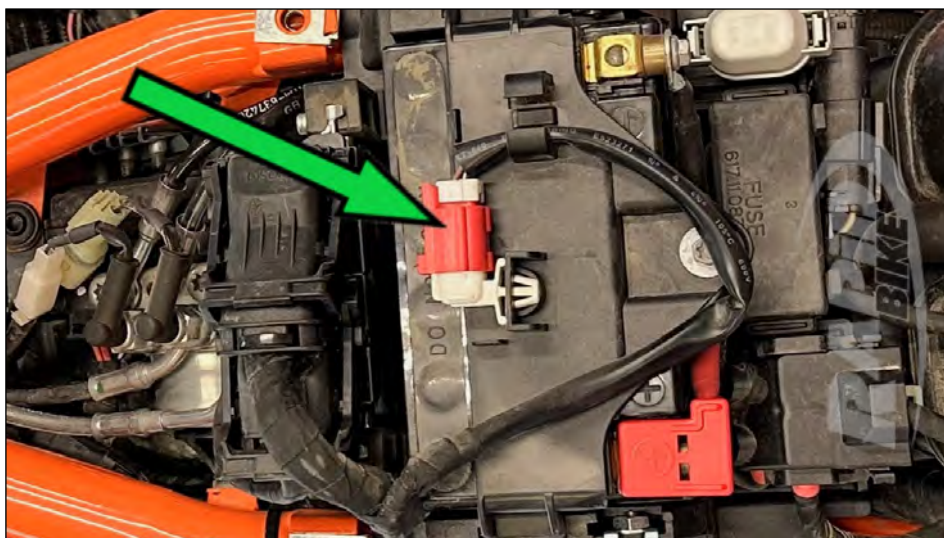

What to do:

Remove the cap and insert the *RB* connector marked as "**DIAGNOSTIC**"

1.7 FINAL OPERATIONS

1. Connect the wiring to the RB control unit.
2. Place the RB control unit in the tail section storage compartment.

Alternatively, the RB control unit can be positioned under the rear left side panel.




3. Check that all connectors have been connected correctly.
4. Reposition the fuel tank, paying close attention to the connection of the pipes and electrical contacts.
5. Reposition all other removed parts and the seat.


1.8 ACCESSORIES and EXTRAS

This RB harness is designed for the use of any accessories:

- USB connector (4 PIN) for connection to PC.
- AUX IN connector (6 pin)** for Rapid Bike accessories.

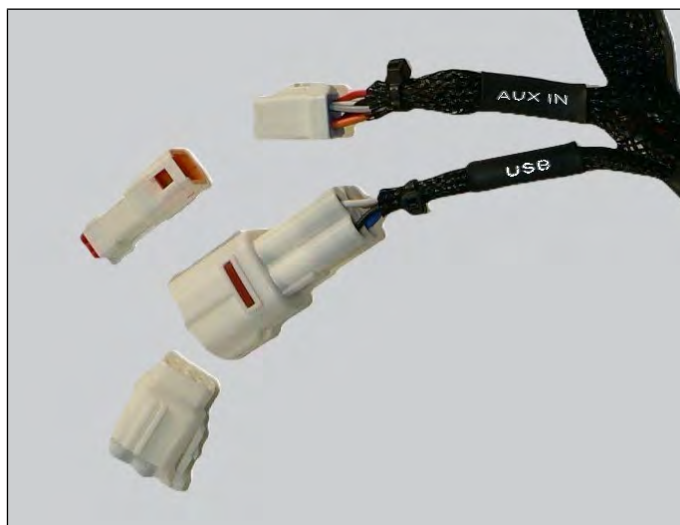

(**) To use EVO/RACING (first version) accessories you need the additional adapter F27-ACC-ER2 to convert the 'AUX IN' with 6 pins into CAN (3 pins) + AUX (3 pins).

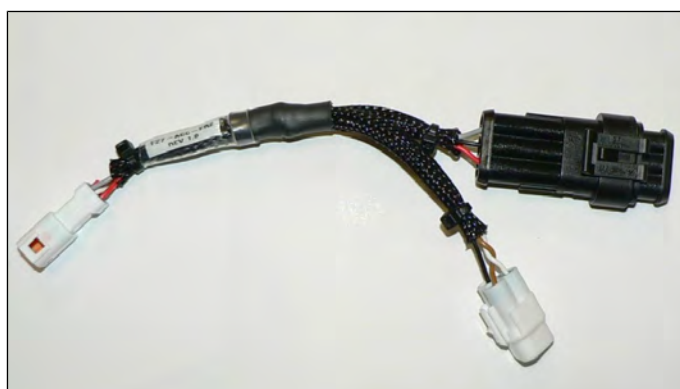

WARNING

Connectors for unused accessories must be sealed with the provided caps.

1.8.1 Smartphones APP

The Bluetooth interface of the **EVO2/RACING2** control unit also allows the connection and management of some parameters with your smartphone; search the “**Rapid Bike**” app available in the Android® and IOS® store.



For further information see the relevant manual in Italian or English:

[2025_Smartphone_RapidBike-APP_it.pdf](#) , , [2025_Smartphone_RapidBike-APP_en.pdf](#)



WARNING

Use of a smartphone while driving is not permitted; with the APP make changes while stationary with the engine idling; close the APP before leaving.

1.8.2 Online functionalities

Useful links for:

Information: <https://www.dimsport.it/en/rapid-bike/>

Reserved area: <https://reserved.dimsport.com/login.aspx>

Software: <https://www.dimsport.it/en/rapid-bike/rapid-bike-software-master/>

Appendix 1

The User declares, under his own responsibility, that device is realized to be used only for competitive purposes in race track which is not open to the public. It is understood that the infringement of the aforementioned limitation may entail a sanctions infliction.

Without prejudice towards what is set forth in previous paragraph, if vehicle performances or characteristics, as indicated in vehicle registration certificate, were to vary, it is necessary to revise such vehicle registration certificate. Therefore, the User shall bring, under his own responsibility, such operations.

RAPID device allows the User to have access to some engine parameters (for example: turbo/manifold pressure, rail, speed limiter, etc.). Changing such parameters might make the vehicle non in compliance with some power and/or speed and/or emissions standards of Your Country and also might determine a superior wear and tear of mechanical and electrical components of the vehicle, to the point that manufacturer's (or seller's) warranty might be considered void.

Dimsport Srl (except as set forth hereafter) does not grant any warranty and shall never be considered liable for any disruption that may derive from using device, in particular with respect to any extra wear and/or deterioration of the engine or of any other mechanical and/or electrical part of vehicle.

The reading and understanding of device Instructions must forerun the use of device (in all its parts).

If the User is a consumer of the provisions of D.lgs 206/2005 which concern the conformity, warranty of purchased items shall apply (in accordance with such D.lgs 206/2005, a consumer is a person that buy products outside from his business). Therefore, the consumer with no extra expenses, has the right to obtain the conformity restatement of purchased item, by its replacement or reparation. For this purpose, Must be informed about item non-conformity within 2 (two) months from the discovery of such non-conformity. This warranty covers the defects that come within 2 (two) years from the delivery. The normal "wear and tear" shall never be considered non-conformity. This warranty shall never be applied if the consumer alters device and/or if the consumer directly or indirectly repairs it and/or if the non-conformity is due to improper, negligent or imprudent use of device.

If the User is a professional user, Only warrants that device is free from manufacture defects for 2 (two) years from the purchase date, provided that the professional user is able to demonstrate such date by showing proper documentation.

UNDER NO CIRCUMSTANCES SHOULD DEVICE BE USED TO BREAK THE LAW OF THE COUNTRY OF USE OF THE VEHICLE. FAILURE TO COMPLY WITH SUCH PROVISION WOULD DETERMINE THE IMMEDIATE TERMINATION OF THIS AGREEMENT.

Without prejudice to mandatory law provisions, Dimsport srl shall be relieved from any and all contractual and / or extra-contractual liability for personal injury; for direct and / or indirect damage (both with reference to emerging damage and loss of profit); for any claim and / or cost of any kind; which has been suffered by the User or by any third parties and which may derive from the use or misuse and / or may depend and / or in any case may be attributable to device, except in the case that those events may be attributable to

Dimsport srl for wilful misconduct or gross negligence. The foregoing limitations and exclusions shall be applied to the maximum extent permitted by legislation in force in the User's jurisdiction.



DIMSPORT S.R.L.
Località San Iorio 8/B
15020 Serralunga di Crea (AL) - Italia
Ph +39 0142 9552 Fax +39 0142 940094
Mail: info@dimsport.it
www.dimsport.it