



Applicability: APRILIA - DUCATI

Cod. KRBEA-015 – INSTALLATION AND USE



1. Turn off the engine.




2. Locate and disconnect the 4 pin black connectors of the two O2 sensors.
Follow the silicone sheath coming from the o2 sensor to find the connectors.



3. Connect the Rapid Bike connectors in-line with the stock wiring.


DUCATI: The Rapid Bike connectors with the red stripe must be connected to the O2 sensor of the front cylinder.

APRILIA: Connect the Rapid Bike connectors without the red stripe to the O2 sensor.

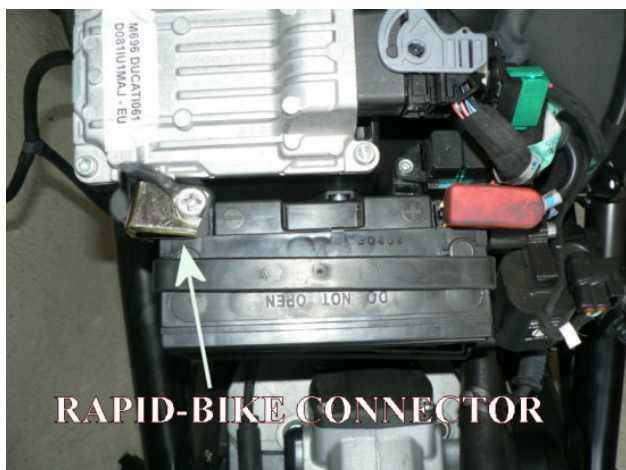


4. Connect the eyelet of the Rapid Bike wiring to negative pole of the battery.

5. Connect the 6 pin connector and the 2 pin connector to the RapidBike Easy module.

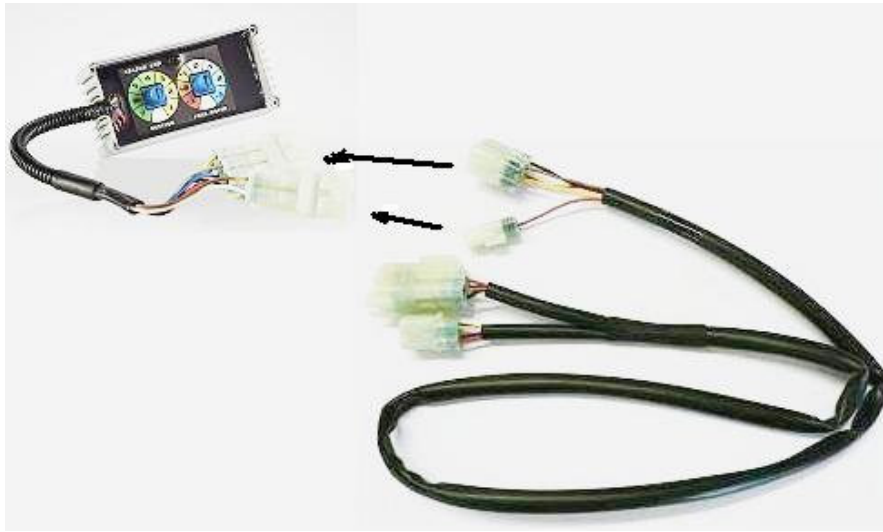

Settings

GREEN LED / LED VERDE

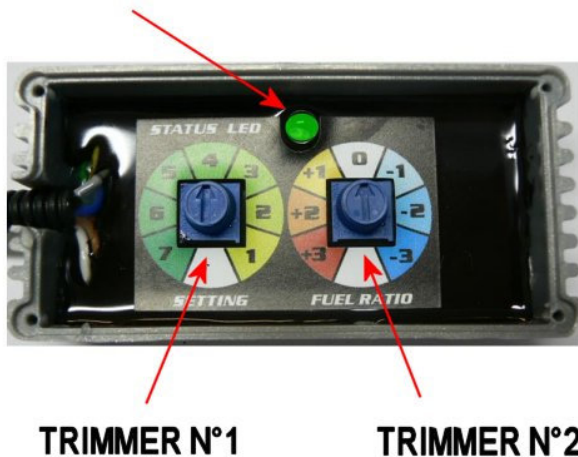

The green led shows the state of the device:

Led off = not powered.

Led on = powered, o2 sensor cold.

Led flashing = powered, o2 sensor hot, the device is working.

6. Set the trimmers as follows:

Trimmer 1 = SETTING

Trimmer 2 = FUEL RATIO

MAKE	MODEL	TRIMMER 1	TRIMMER 2
All	All models	5	+2

7. Turn on the ignition and verify that the green led is on.
8. Turn on the engine and wait some minutes until the green led starts to flash.
9. Fasten the cover with the screws.

Dimsport Srl

*Zona Industriale Madonnina - Loc. San Iorio
15020 SERRALUNGA DI CREA (AL) - ITALY
T (+39) 0142.9552 F (+39) 0142.940094
www.dimsport.it*

RapidBike

ASSISTENZA TECNICA – TECHNICAL SUPPORT

Tel. (+39) 0142.9552

E-mail: support.rapidbike@dimsport.it

UFFICIO COMMERCIALE – COMMERCIAL DEPT.

Tel. (+39) 0142.9552

E-mail: info.rapidbike@dimsport.it



a company of
una azienda del gruppo



www.rapidbike.it
